




Metric DIN 127 Type B Helical Spring Split Lock Washers

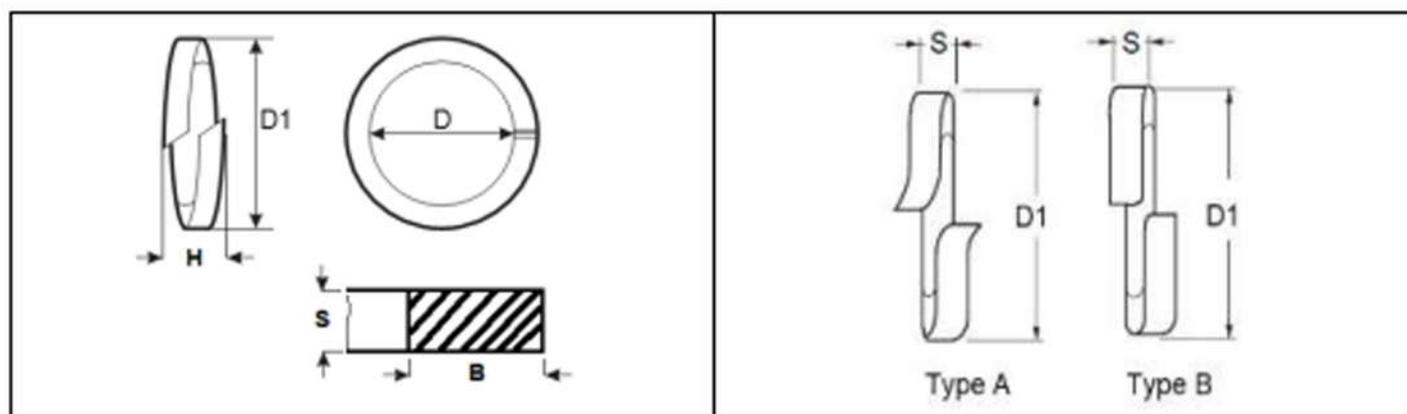

Nominal Diameter	D min.	D max.	D1 max.	B	S	H min.	H max.	Weight kg /1000pcs
M2	2.1	2.4	4.4	0.9 ± 0.1	0.5 ± 0.1	1	1.2	0.033
M2.2	2.3	2.6	4.8	1 ± 0.1	0.6 ± 0.1	1.2	1.4	0.05
M2.5	2.6	2.9	5.1	1 ± 0.1	0.6 ± 0.1	1.2	1.4	0.053
M3	3.1	3.4	6.2	1.3 ± 0.1	0.8 ± 0.1	1.6	1.9	0.11
M3.5	3.6	3.9	6.7	1.3 ± 0.1	0.8 ± 0.1	1.6	1.9	0.12
M4	4.1	4.4	7.6	1.5 ± 0.1	0.9 ± 0.1	1.8	2.1	0.18
M5	5.1	5.4	9.2	1.8 ± 0.1	1.2 ± 0.1	2.4	2.8	0.36
M6	6.4	6.5	11.8	2.5 ± 0.15	1.6 ± 0.1	3.2	3.8	0.83
M7	7.1	7.5	12.8	2.5 ± 0.15	1.6 ± 0.1	3.2	3.8	0.93
M8	8.1	8.5	14.8	3 ± 0.15	2 ± 0.1	4	4.7	1.6
M10	10.2	10.7	18.1	3.5 ± 0.2	2.2 ± 0.15	4.4	5.2	2.53
M12	12.2	12.7	21.1	4 ± 0.2	2.5 ± 0.15	5	5.9	3.82
M14	14.2	14.7	24.1	4.5 ± 0.2	3 ± 0.15	6	7.1	6.01
M16	16.2	17	27.4	5 ± 0.2	3.5 ± 0.2	7	8.3	8.91
M18	18.2	19	29.4	5 ± 0.2	3.5 ± 0.2	7	8.3	9.73
M20	20.2	21.2	33.6	6 ± 0.2	4 ± 0.2	8	9.4	15.2

Cont...