




## Metric DIN 444 Eye Bolts

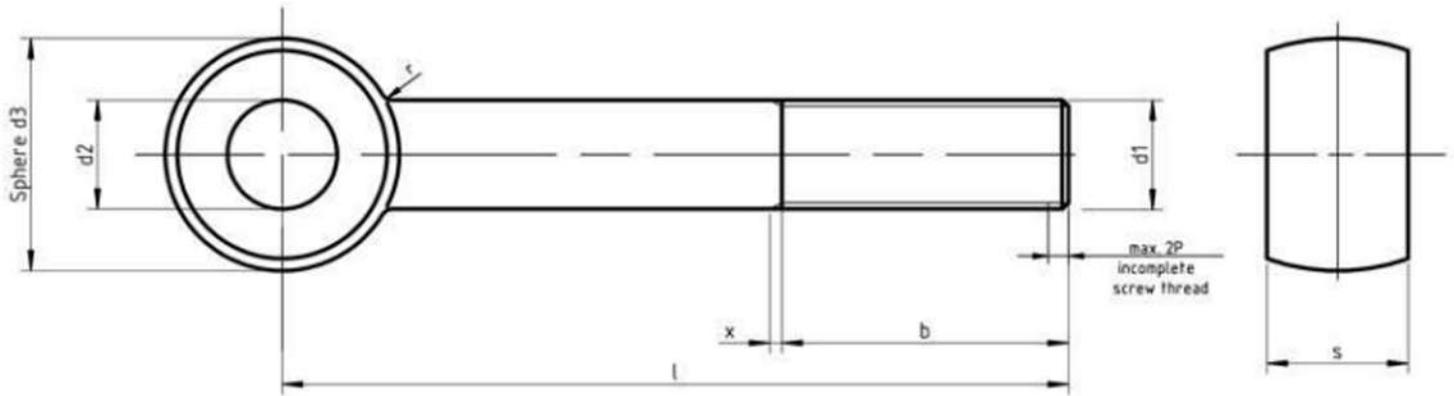

Type A (product grade C = design g)  
 Type B (product grade B = design mg)  
 Type C (product grade A = design m)

### Dimensions of Metric DIN 444 Eye Bolts

Thread		M5	M6	M8	M10	M12	M16	M20	M24	(M27)	M30	(M33)	M36	(M39)
b	+2P	0.8	1	1.25	1.5	1.75	2	2.5	3	3	3.5	3.5	4	4
	0	16	18	22	26	30	38	46	54	60	66	-	-	-
d2	H9	-	-	28	32	36	44	52	60	66	72	78	84	90
	max.	-	-	-	-	49	57	65	73	79	85	91	97	103
d3	max.	5	6	8	10	12	16	18	22	24	27	30	32	35
	min. Type A	12	14	18	20	25	32	40	45	50	55	60	65	70
	min. Type B and C	10.9	12.9	16.9	18.7	23.7	30.4	38.4	43.4	48.4	53.1	58.1	63.1	68.1
r	approx.	11.57	13.57	17.57	19.48	24.48	31.38	39.38	44.38	49.38	54.26	59.26	64.26	69.26
		2.5	4	4	4	6	6	6	10	10	10	16	16	16