




Metric DIN 7982C - Cross Recessed Flat Countersunk Head Self-Tapping Sheet Metal Screws

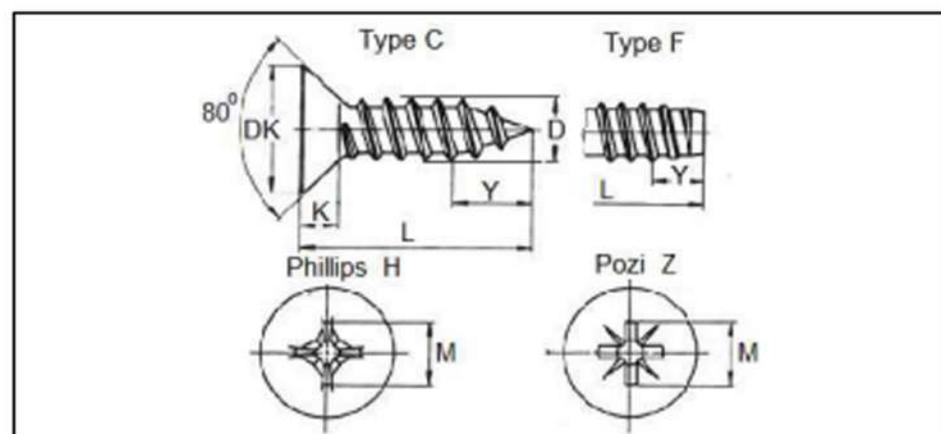

Dimensions of Metric DIN 7982C Flat Countersunk Head Self-Tapping Sheet Metal Screws

Thread size		2.2	2.9	3.5	(3.9)	4.2	4.8	5.5	6.3		
P		0.8	1.1	1.3	1.3	1.4	1.6	1.8	1.8		
a	max.	0.8	1.1	1.3	1.3	1.4	1.6	1.8	1.8		
DK	nominal=max.	4.2	5.6	6.9	7.5	8.2	9.5	10.8	12.5		
	min.	3.9	5.3	6.54	7.14	7.84	9.14	10.37	12.07		
K	nominal=max.	1.8	2.2	2.6	2.8	3.05	3.55	3.95	4.55		
	min.	1.55	1.95	2.35	2.55	2.75	3.25	3.65	4.25		
Cross recess		No.		1	1	2	2	2	2	3	3
Type H	m	approx.	2.6	3	4.2	4.4	4.6	5	6.5	7.1	
	Penetration depth	min.	0.86	1.35	1.4	1.63	1.8	2.26	2.49	3	
		max.	1.32	1.8	2.03	2.26	2.46	2.87	3.15	3.66	
Type Z	m	approx.	2.4	2.9	3.9	4.1	4.3	4.7	6.2	6.7	
	Penetration depth	min.	1.1	1.58	1.47	1.7	1.88	2.28	2.51	3.02	
		max.	1.35	1.83	1.93	2.16	2.34	2.74	2.97	3.48	
y	max.	Type C	2	2.6	3.2	3.5	3.7	4.3	5	6	
		Type F	1.6	2.1	2.5	2.7	2.8	3.2	3.6	3.6	