




## Metric DIN 913 Hexagon Socket Set Screws with Flat Point

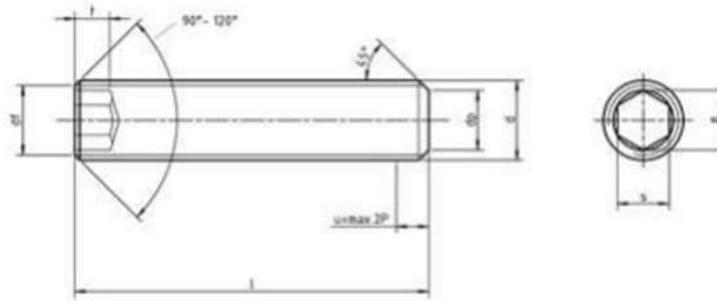

**Dimensions of Metric DIN 913 hexagon socket set screws with flat point**

Thread d	M1.4	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	
P	0.3	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3	
df	approx.	Lower limit of minor thread diameter													
dp	max.	0.7	0.8	1	1.5	2	2.5	3.5	4	5.5	7	8.5	12	15	18
	min.	0.45	0.55	0.75	1.25	1.75	2.25	3.2	3.7	5.2	6.64	8.14	11.57	14.57	17.57
e	min.	0.803	0.803	1.003	1.427	1.73	2.3	2.87	3.44	4.58	5.72	6.86	9.15	11.43	13.72
s	Nom.	0.7	0.7	0.9	1.3	1.5	2	2.5	3	4	5	6	8	10	12
	min.	0.711	0.711	0.889	1.27	1.52	2.02	2.52	3.02	4.02	5.02	6.02	8.025	10.025	12.032
	max.	0.724	0.724	0.902	1.295	1.545	2.045	2.56	3.08	4.095	5.095	6.095	8.115	10.115	12.142
t	min.	0.6	0.7	0.8	1.2	1.2	1.5	2	2	3	4	4.8	6.4	8	10
	min.	1.4	1.5	1.7	2	2	2.5	3	3.5	5	6	8	10	12	15