




Metric DIN 915 Hexagon Socket Set Screws with Dog Point

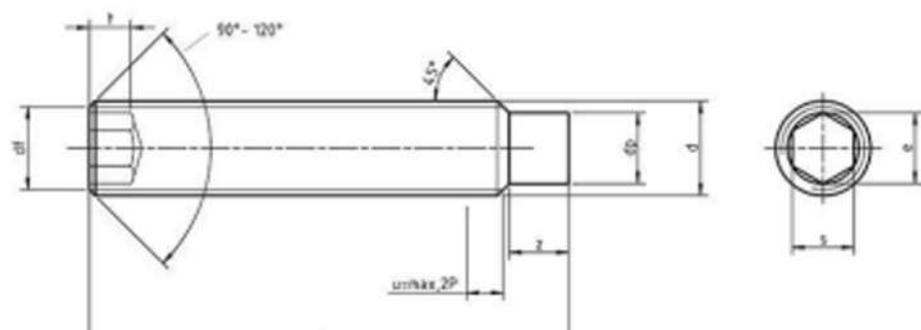

Dimensions of Metric DIN 915 hexagon socket set screws with dog point

Thread d	M1.4	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	
P	0.3	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3	
df	approx.	Lower limit of minor thread diameter													
dp	max.	0.7	0.8	1	1.5	2	2.5	3.5	4	5.5	7	8.5	12	15	18
	min.	0.45	0.55	0.75	1.25	1.75	2.25	3.2	3.7	5.2	6.64	8.14	11.6	14.57	17.57
e	min.	0.803	0.803	1.003	1.427	1.73	2.3	2.87	3.44	4.58	5.72	6.86	9.15	11.43	13.72
s	Nom.	0.7	0.7	0.9	1.3	1.5	2	2.5	3	4	5	6	8	10	12
	min.	0.711	0.711	0.889	1.27	1.52	2.02	2.52	3.02	4.02	5.02	6.02	8.03	10.03	12.03
	max.	0.724	0.724	0.902	1.295	1.545	2.045	2.56	3.08	4.095	5.095	6.095	8.12	10.12	12.14
t	min.	0.6	0.7	0.8	1.2	1.2	1.5	2	2	3	4	4.8	6.4	8	10
	max.	1.4	1.5	1.7	2	2	2.5	3	3.5	5	6	8	10	12	15
z	min.	0.4	0.4	0.5	0.63	0.75	1	1.25	1.5	2	2.5	3	4	5	6
	max.	0.65	0.65	0.65	0.88	1	1.25	1.5	1.75	2.25	2.75	3.25	4.3	5.3	6.3
	min.	0.8	0.8	1	1.25	1.5	2	2.5	3	4	5	6	8	10	12
	max.	1.05	0.724	1.25	1.5	1.75	2.25	2.75	3.25	4.3	5.3	6.3	8.36	10.36	12.43