


Metric DIN 916 Hexagon Socket Set Screws with Cup Point

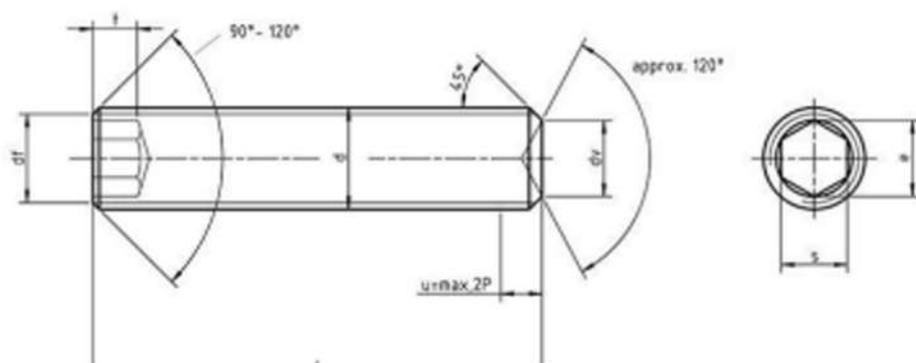

Dimensions of Metric DIN 916 hexagon socket set screws with cup point

Thread d	M1,4	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	
P	0.3	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3	
dv	max.	0.7	0.8	1	1.2	1.4	2	2.5	3	5	6	8	10	14	16
	min.	0.45	0.55	0.75	0.95	1.15	1.75	2.25	2.75	4.7	5.7	7.64	9.64	13.57	15.57
df	approx.	Lower limit of minor thread diameter													
e	min.	0.8	0.803	1.003	1.427	1.73	2.3	2.87	3.44	4.58	5.72	6.86	9.15	11.43	13.72
s	nominal	0.7	0.7	0.9	1.3	1.5	2	2.5	3	4	5	6	8	10	12
	min.	0.71	0.711	0.89	1.27	1.52	2.02	2.52	3.02	4.02	5.02	6.02	8,025	10,025	12,032
	max.	0.72	0.724	0.9	1,295	1,545	2,045	2,56	3,08	4,095	5,095	6,095	8,115	10,115	12,142
t	min.	0.6	0.7	0.8	1.2	1.2	1.5	2	2	3	4	4.5	6.4	8	10
	min.	1.4	1.5	1.7	2	2	2.5	3	3.5	5	6	8	10	12	15