




Metric DIN 963 Slotted Flat Countersunk Head Machine Screws

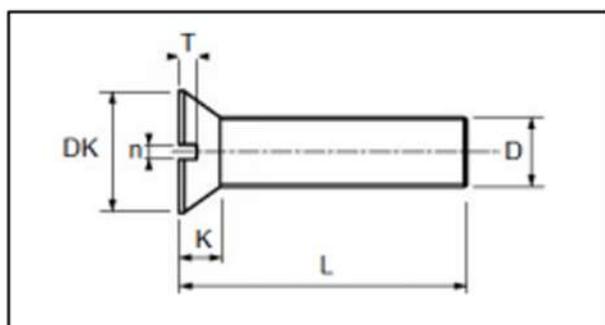

Thread D	M1	M1.2	M1.4	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16	M20	
P	0.25	0.25	0.3	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	
A	max.	0.5	0.5	0.6	0.7	0.8	0.9	1	1.4	1.6	2	2.5	3	3.5	4	5
B	min.	full thread			15	16	18	19	22	25	28	34	40	46	58	70
DK	nominal															
	max.	1.9	2.3	2.6	3	3.8	4.7	5.6	7.5	9.2	11	14.5	18	22	29	36
DK	min.	1.76	2.06	2.46	2.86	3.5	4.4	5.3	7.14	8.9	10.6	14.1	17.6	21.5	28.5	35.4
K	max.	0.6	0.72	0.86	0.96	1.2	1.5	1.65	2.2	2.5	3	4	5	6	8	10
n	nominal	0.25	0.3	0.3	0.4	0.5	0.6	0.8	1	1.2	1.6	2	2.5	3	4	5
	max.	0.31	0.36	0.36	0.46	0.56	0.66	0.86	1.06	1.26	1.66	2.06	2.56	3.06	4.07	5.07
	min.	0.45	0.5	0.5	0.6	0.7	0.8	1	1.2	1.51	1.91	2.31	2.81	3.31	4.37	5.37
r	max.	0.1	0.12	0.14	0.16	0.2	0.25	0.3	0.4	0.5	0.6	0.8	1	1.2	1.6	2
T	min.	0.2	0.25	0.28	0.32	0.4	0.5	0.6	0.8	1	1.2	1.6	2	2.4	3.2	4
	max.	0.3	0.35	0.4	0.45	0.6	0.7	0.85	1.1	1.3	1.6	2.1	2.6	3	4	5
X	max.	-	-	-	0.9	1	1.1	1.25	1.75	2	2.5	3.2	3.8	4.4	5	6.3

All measurements are in mm