




## Metric DIN 6798 Serrated Lock Washers

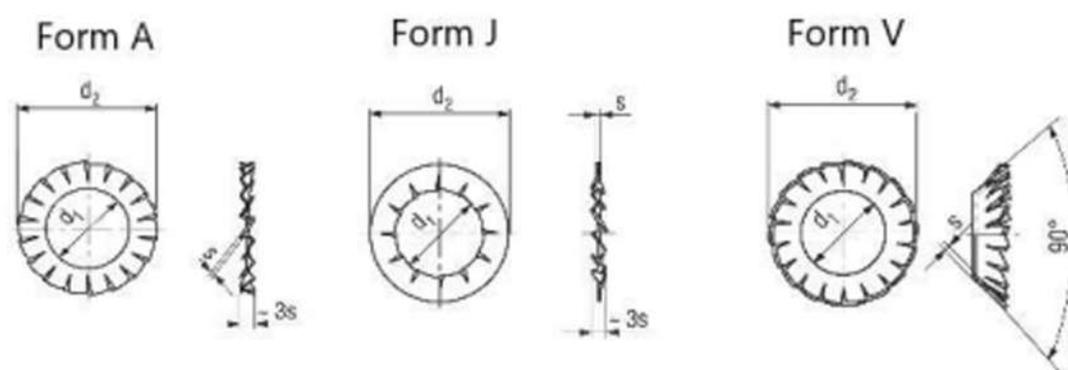

Dimensions of Metric DIN 6798 Serrated Lock Washers

For thread	Nominal size	d1		d2		s1	Min. number of teeth	Min. number of teeth	Weight kg/1000pcs	d3 approx.	Type V		
		Nominal size - Min.	Max.	Nominal size - max.	Min.						s2	Min. number of teeth	Weight kg/1000pcs
M1.6	1.7	1.7	1.84	3.6	3.3	0.3	9	7	0.02	-	-	-	-
M2	2.2	2.2	2.34	4.5	4.2	0.3	9	7	0.03	4.2	0.2	10	0.025
M2.5	2.7	2.7	2.84	5.5	5.2	0.4	9	7	0.045	5.1	0.2	10	0.03
M3	3.2	3.2	3.38	6	5.7	0.4	9	7	0.06	6	0.2	12	0.04
M3.5	3.7	3.7	3.88	7	6.64	0.5	10	8	0.11	7	0.25	12	0.075
M4	4.3	4.3	4.48	8	7.64	0.5	11	8	0.14	8	0.25	14	0.1
M5	5.3	5.3	5.48	10	9.64	0.6	11	8	0.26	9.8	0.3	14	0.2
M6	6.4	6.4	6.62	11	10.57	0.7	12	9	0.36	11.8	0.4	16	0.3
M7	7.4	7.4	7.62	12.5	12.07	0.8	14	10	0.5	-	-	-	-
M8	8.4	8.4	8.62	15	14.57	0.8	14	10	0.8	15.3	0.4	18	0.5
M10	10.5	10.5	10.77	18	17.57	0.9	16	12	1.25	19	0.5	20	1
M12	13	13	13.27	20.5	19.98	1	16	12	1.6	23	0.5	26	1.5